

SECTION G

GASKET, HOSE - 1-1/2" NON-METALLIC

NSN 5330-00-239-1873


WT. 0.1 lbs **VOL.** 0.5 in³

DESCRIPTION: 1-1/2" synthetic rubber gasket provides a watertight seal for 1-1/2" hose connections.

USE: Used in 1-1/2 inch fire hose female coupling.

USE TIP: Stow in package of ten secured with piece of marline.

REF: Dewatering Equipment Kit, Parent AEL, Portable Pump Accessories Kit and Repair Locker Tool Kit.

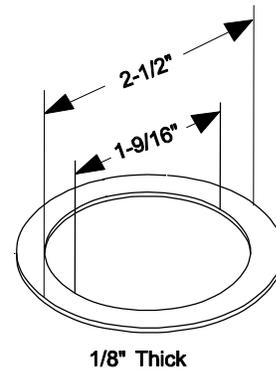

GASKET, HOSE - 1-9/16" FLAT, RUBBER

NSN 5310-00-728-7702


WT. 0.1 lbs **VOL.** 0.4 in³

DESCRIPTION: Rubber gasket provides a seal for 1-1/2" hose Connections.

USE: Used in 1-1/2 inch fire hose female coupling/nozzle.

USE TIP: Stow in pack of two (10 each) secured with piece of marline.


REF: Repair Locker Tool Kit.

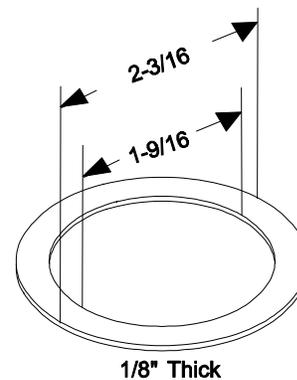

GASKET, HOSE - 2-1/2" RUBBER

NSN 5330-00-239-1877

WT. 0.1 lbs **VOL.** 1.2 in³



DESCRIPTION: Rubber gasket provides a watertight seal for sub-pump hose connection.

USE: Used in 2-1/2 inch sub-pump female connector and fire hose female coupling.


USE TIP: Stow in packs of five secured with a piece of marline.

REF: Repair Locker Tool Kit.

GASKET, HOSE - 2-1/2" NON-METALLIC

NSN 5330-00-246-2914

WT. 0.1 lbs **VOL.** 1.3 in³



DESCRIPTION: Non-metallic gasket provides a watertight seal for the submersible pump hose connection.

USE: Used in 2 1/2 inch fire hose female coupling and wye/tri-gate female connector.


USE TIP: Stow in packs of 25 (1 unit) secured with a piece of marline.

REF: Dewatering Equipment Kit, Portable Pump Accessories Kit and Repair Locker Tool Kit.

GASKET, WASHER - 3" RUBBER

NSN 5330-00-239-1879

WT. 0.2 lbs **VOL.** 1.4 in³



DESCRIPTION: Rubber gasket provides a watertight seal for P-100 pump accessories.

USE: Used in 3 inch suction hose, P-250 female fitting and footvalve.


USE TIP: Stow in packs of five secured with a 12" piece of marline.

REF: Dewatering Equipment Kit. Portable Pump Accessories Kit.

GASKET, WASHER - 4" RUBBER

NSN 5310-00-239-1882

WT. 0.2 lbs **VOL.** 1.5 in³



DESCRIPTION: Rubber gasket provides a watertight seal.

USE: Used in 4 inch discharge hose female coupling and 4 inch eductor female coupling.

USE TIP: Stow in packs of 10 secured with a piece of marline.

REF: Dewatering Equipment Kit. Portable Pump Accessories Kit.


GLOVES, DIVERS (CUT RESISTANT)

1HS0000-LL-CQA-4568 (select size)

NSN 4220-01-397-7348 - sz med

4220-01-397-7349 - sz lg

WT. 0.5 lbs. **VOL.** 56.0 in.³

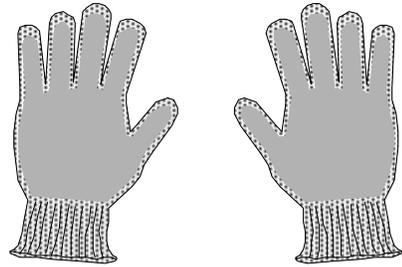

DESCRIPTION: Gloves covered with rubber studs. Provides protection against cuts and also provides grip when working with steel banding.

USE: Used during banding operations and when installing Jubilee Patches.


USE TIP: Always wear gloves - cut resistant type, eye protection and long sleeves for personnel safety. Two pair per kit.

REF: Banding Tool Kit. Pipe Patching Kit.

GOGGLES - INDUSTRIAL

NSN 4240-01-063-5996

WT. 0.4 lbs. **VOL.** 24.0 in.³

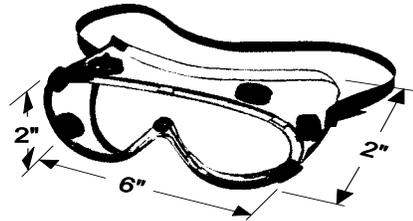

DESCRIPTION: Plastic glasses with large front and covered sides large enough to fit over regular eyeglasses with adjustable strap.

USE: Provides general eye protection for various DC equipment maintenance.


USE TIP: Adjust strap for comfortably secure fit.

REF: Damage Control Petty Officer (DCPO) Kit.

**GUN - GREASE, PISTOL GRIP
WITH 12" GREASE HOSE
14 OZ. CARTRIDGE**

NSN 4930-00-965-0288

WT. 3.0 lbs. **VOL.** 50.0 in³

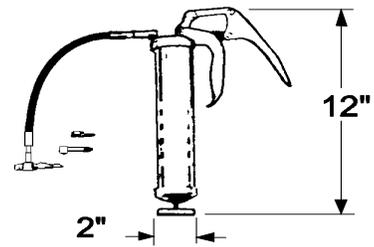

DESCRIPTION: Grease gun with replaceable cartridge for refilling.

USE: Used to perform PMS functions where lubrication is required.

USE TIP: Wipe unit clean before storing.

REF: Damage Control Petty Officer (DCPO) Kit.
