


SECTION H

HALLIGAN TOOL - QUICBAR

NSN 5120-00-009-5044

WT. 10.0 lbs. **VOL.** 180.0 in³

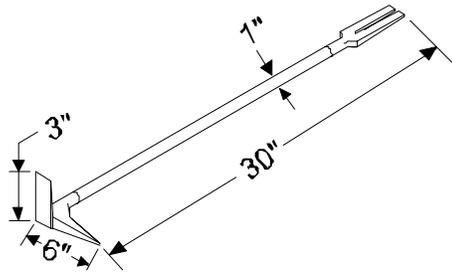

DESCRIPTION: Separate claw and head sections that are drop forged from high alloy steel. Claw and head are press-fitted and welded to a 1 inch stress-proof bar. Claw is sharpened for easy entry and slotted to fit hasps, locks, hatches, etc. Pick end is long, sharp and tapered. Flat "duckbill" side of the heads used for forcing windows and interior doors open. All tool parts are heat treated for strength and durability. High gloss chrome plated finish for appearance and easy maintenance.

USE: Used for gaining entrance to aircraft during firefighting/rescue operations.


USE TIP: Apply leverage carefully to avoid injury due to tool slipping. Do not use a pipe for additional leverage.

REF: Parent AEL (No. 211 only).

HAMMER - HAND

5120-00-061-8543

WT. 1.5 lbs **VOL.** 54.4 in³

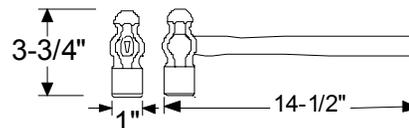

DESCRIPTION: Forged steel head. Polished face and peen. 14-1/2 inch hickory handle. Flat striking surface on one face, round striking peen on the other.

USE: Used for driving metal punches, working on sheet metal,

USE TIP: Wear safety glasses when striking brittle objects that may shatter.

REF: Electrical Repair Kit.

HAMMER - MACHINIST
1-1/2 LB.

NSN 5120-00-061-8545


WT. 2.0 lbs. **VOL.** 60.0 in³

DESCRIPTION: Forged steel head. Polished face and peen. 15 inch hickory handle,

USE: Used to perform certain DC PMS functions and to tap down buckle ears in pipe banding operations.

USE TIP: Wear safety glasses when striking brittle objects that may shatter.

REF: Damage Control Petty Officer (DCPO) Kit. Banding Tool Kit.

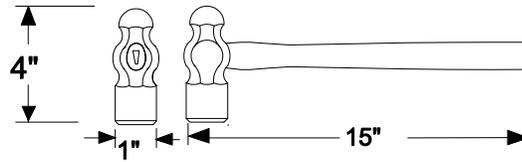

HAMMER - HAND, BALLPEEN
MACHINIST 2 LB.

NSN 5120-00-061-8546


WT. 2.5 lbs **VOL.** 76.0 in³

DESCRIPTION: Forged steel head. Polished flat striking surface on one face and round striking peen on the other end. 16 inch hickory handle. Head weight - 12 oz.


USE: Used in metal work, pipe repair and other DC functions.

USE TIP: Wear safety glasses when striking brittle objects that may shatter.

REF: Pipe Patching Kit.

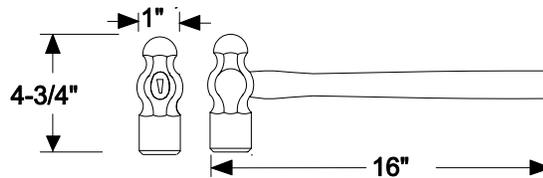

HAMMER - BLACKSMITH SLEDGE
12 LB.
CROSSPEEN HEAD

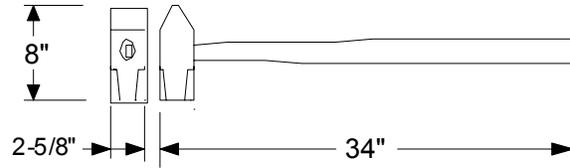

NSN 5120-00-224-4130

WT. 12.0 lbs. **VOL.** 678.1 in.³


DESCRIPTION: Engineer's hammer, extra heavy head. Forged steel crosspeen head.

USE: Used in DC/fire fighting access and post casualty salvage operations.

USE TIP: Make sure to have enough room to swing this long handled hammer to avoid personnel injury or broken handle.

REF: Firefighting/Access Equipment Kit.

HAMMER - RIPPING
CARPENTER'S STRAIGHT CLAW
1-1/4 LB. HEAD

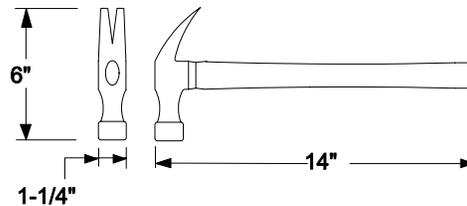

NSN 5120-00-892-5744

WT. 1.8 lbs. **VOL.** 105.9 in.³

DESCRIPTION: Carpenter's straight claws ripping hammer. Forged steel head. Bright polished plain bellface.

USE: Used in shoring operations.

USE TIP: Wear safety glasses when using hammer.


REF: Shoring Tool Kit.

HATCHET - HALF TYPE C

NSN 5110-00-228-3161

WT. 2.1-2.6 lbs

VOL. 112.5 in³

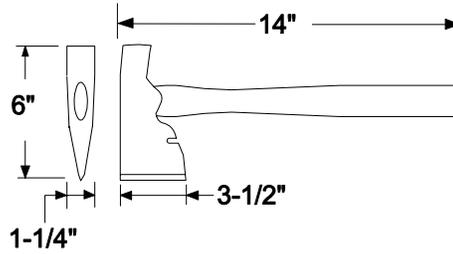

DESCRIPTION: 3-1/2 inch wide cutting edge, Headweight - 18 to 26 oz., beveled slot for removing nails.

USE: Used in shoring , plugging and pipe patching.

USE TIP: Cutting edges should be padded (cardboard etc.) to prevent injury and extend the life of the kit bag.


REF: Shoring Tool Kit. Pipe Patching Kit. Plugging Kit.

HATCHET - LATHING
2-1/4" CUTTING EDGE

NSN 5110-00-223-5379

WT. 2.1-2.6 lbs

VOL. 112.5 in³

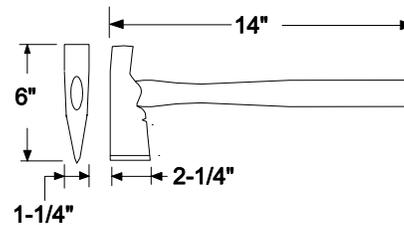

DESCRIPTION: Beveled slot for drawing nails. The head contains machine cut checkered serration. Cutting edge 2-1/4 inches wide. Head weight 12 to 17 oz.

USE: Used in plugging operations.

USE TIP: Cutting edges should be padded (cardboard etc.) to prevent injury and extend the life of the kit bag.


REF: Plugging Kit.

**HEADSET CHEST SET -
SOUND POWER PHONES**

NSN 5965-00-900-6401

WT. 4.0 lbs

VOL. 472.9 in.³

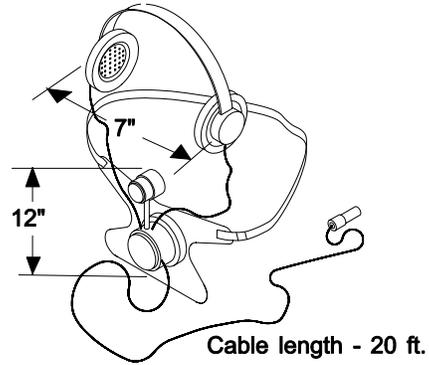

DESCRIPTION: Complete, assembled set includes: headband assembly, two 1200-ohm earphone assemblies, 110-ohm microphone assembly w/mouth-piece and push-button switch, chest plate assembly with junction box and DCOP-1-1/2 cable assembly with H-39A plug jack. Type H-2000/U and H-202/U.

USE: Used in DC communications. Sound powered telephone headset chest sets designed for shipboard use.

USE TIP: Adjust to assure microphone is proper distance from mouth.


REF: Emergency Communications Kit.

HELMET - WELDER

NSN 4240-00-540-0623

WT. 1.8 lbs.

VOL. 828.7 in³

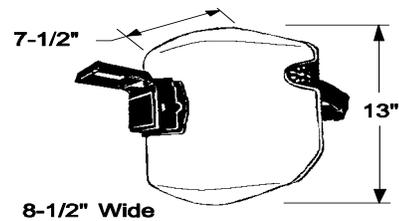

DESCRIPTION: Face protection that covers front of head and provides eye protection with the use of dark welders lens.

USE: Used while conducting TIG/ARC welding operations.


USE TIP: 12 clear lenses and shades provided in kit.

REF: Welding Equipment Kit.

HOLDER - ELECTRODE WELD

NSN 3439-00-238-1638

WT. 1.1 lbs **VOL.** 34.0 in³

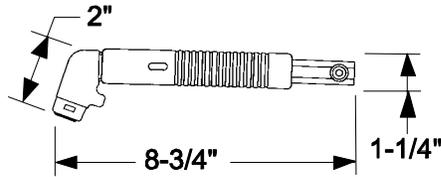

DESCRIPTION: A handle which holds the electrode and enables the welder to guide the arc during welding operations.

USE: Used to hold electrode while performing arc welding operations.


USE TIP: Complete protective gear must be worn during welding operations.

REF: Welding Equipment Kit.

**HOLDING TOOL
WRENCH - CHAIN TYPE**

NSN 5120-00-889-2050

WT. 3.0 lbs **VOL.** 162.0 in.³

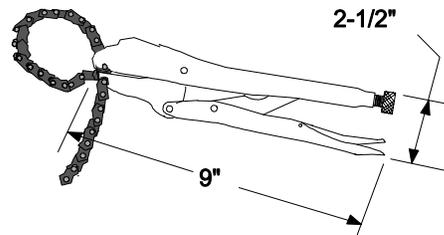

DESCRIPTION: Vice grip type of wrench for holding pipes. Has an 18" chain.

USE: Used with the strongback in pipe patching operations..


USE TIP: Dry wrench after use. Keep lubricated and wrapped with a rag, to prevent rusting. NAVSEA will outfit as funds are available.

REF: Banding Tool Kit.

HOSE ASSEMBLY - 1-1/2" NPSH x 50 FT.
NON-METALLIC, SYNTHETIC JACKETED

NSN 4210-01-131-0249

WT. 25.0 lbs. **VOL.** 1,772.0 in.³



DESCRIPTION: Type 1, Class A hose, double jacketed polyamide fiber with a rubber lining. The outer jacket is impregnated with hypalon which contains an orange color pigmentation. Mildew resistant.

USE: Used for fire fighting from a fire plug or wye connection. Also used in dewatering as the inlet hose for the 1-1/2 inch eductor.


USE TIP: Hydrostatic test pressure 300 PSI, burst pressure 600 PSI. Use female to male couplings.

REF: Dewatering Equipment Kit. Firefighting/Access Equipment Kit. Portable Pump Accessories Kit.

HOSE ASSEMBLY - 2-1/2" NH x 50 FT.
NON-METALLIC

NSN 4210-01-131-0247

WT. 35.0 lbs. **VOL.** 2,890.0 in.³



DESCRIPTION: Type 1, Class A hose, double jacketed polyamide fiber with a rubber lining. The outer jacket is impregnated with hypalon which contains an orange color pigmentation. Mildew resistant.

USE: Used for fire fighting from a fire plug or P-100 or P-250 pump. Used in dewatering as follows: discharge hose for submersible pump and 1-1/2 inch eductor, inlet for peri-jet eductor; also as a jumper line.


USE TIP: Hydrostatic test pressure 300 PSI, burst pressure 600 PSI. Use female to male couplings.

REF: Dewatering Equipment Kit. Portable Pump Accessories Kit.

HOSE ASSEMBLY - 4"
NON-METALLIC

NSN 4210-01-220-6648

WT. 60.0 lbs. **VOL.** 4,064.0 in³



DESCRIPTION: It is a double jacketed, cotton, rubber lined 50' hose used to discharge water overboard from an eductor.

USE: Used to connect to Peri-jet eductor discharge side during dewatering operations.


USE TIP: Connects with 4 inch double male to overboard discharge connection. Use female to male couplings.

REF: Dewatering Equipment Kit. Portable Pump Accessories Kit.

HOSE ASSEMBLY - AIR DUCT
10" DIA EXTENDS TO 15' LENGTH
INTENDED FOR USE WITH PORTABLE WATER
DRIVEN FAN.

NSN 4720-01-378-6044

WT. 21.0 lbs. **VOL.** 3,000.0 in.³

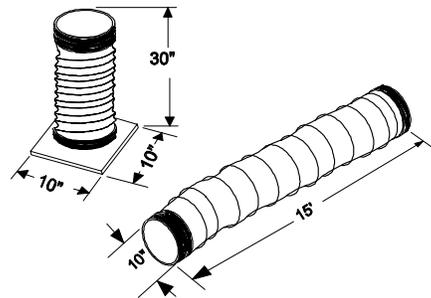

DESCRIPTION: Cotton duct fabric reinforced with helically wound continuous supported zinc plated wire, and impregnated with synthetic rubber. Issued by the foot unless otherwise indicated. Fitted with steel, zinc plated self-locking couplings, one female and one male. 10 inch ID, 15 ft long.

USE: Used for desmoking and gas freeing operations with portable ventilating equipment.


USE TIP: Four per kit.

REF: Desmoking Equipment Kit.

HOSE ASSEMBLY – NON-METALLIC
SUCTION, 3" x 10'

NSN 4210-00-725-9234

WT. 30.0 lbs. **VOL.** 3,000.0 in³

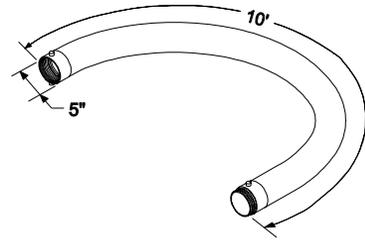

DESCRIPTION: Rubber tubing covered by first layer of rubber impregnated fabric; second layer helix steel coil; outer layer of molded rubber. Fuel, oil and ozone resistant. Female to male RH/NH threaded copper alloy coupling.

USE: Used as a suction hose to deliver water from the footvalve to the portable P-100 pump, also for fresh water use.


USE TIP: Quantity depends on freeboard.

REF: Portable Pump Accessories Kit.

HOSE ASSEMBLY – NON-METALLIC
2-1/2" x 10 FT.

NSN 4720-00-221-8763

WT. 16.0 lbs. **VOL.** 2,430.0 in³

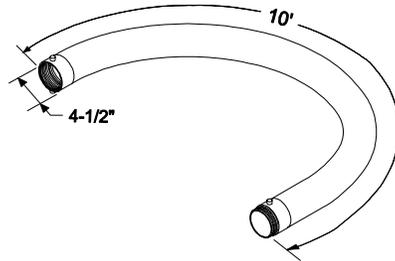


DESCRIPTION: Synthetic rubber, 1st layer spiral laid steel wire. 2nd layer braided steel wire, outer layer chloroprene molded rubber. ID 2.500 inches, OD A/A. Water resistant. First end straight, gasket seal swivel nut, threaded internal hose. 2.500 - 7-1/2 NH RH. Second end straight, plain threaded external hose. 2.500 - 7-1/2 NH RH. Brass fittings. Hard suction line.

USE: Used as suction hose with submersible pump. Use with 2-1/2" foot valve/strainer.

USE TIP: Four per kit. MHC 51 Class requires 2 per kit. Prime hose line before operating pump.

REF: Dewatering Equipment Kit.

**HOSE ASSEMBLY - NON-METALLIC
JUMPER DISCHARGE HOSE FOR P-250
TO WYE-GATE/SIAMESE CONNECTION
2-1/2" x 18"**

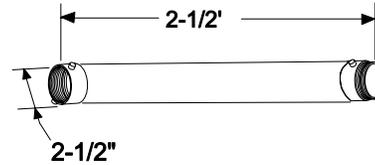

NSN 4210-01-273-4727

WT. 6.8 lbs **VOL.** 607.5 in³


DESCRIPTION: Rubber or synthetic rubber hose.

USE: Used for P-250 pump operation as a jumper discharge hose from pump discharge to wye-gate/tri-gate; siamese connection.

USE TIP: Provides easy access to the connection.

REF: Portable Pump Accessories Kit.

**HOSE ASSEMBLY - RUBBER EXHAUST HOSE, BLACK
2" x 20 FT.**



NSN 4210-00-776-0657

WT. 23.0 lbs. **VOL.** 2,940.0 in³

DESCRIPTION: Rubber chloroprene hose covered with rubber impregnated fabric, second layer of coiled helix steel and an outer layer of molded chloroprene rubber.

USE: Used to transfer exhaust fumes and gases to an outside atmosphere in cases where the P-250 pump is used in a confined space below decks.


USE TIP: Hydrostatic test pressure at 100 lbs PSI.

REF: Portable Pump Accessories Kit.

HOSE - NON-METALLIC
1-1/2" X 15' HOSE - NO FITTINGS
FOR SAW BLADE PROTECTION

NSN 4720-00-230-6481

WT. 6.3 lbs. **VOL.** 133.2 in³



DESCRIPTION: Rubber or synthetic rubber smooth bore tube, reinforced with wrapped fabric or braided yarn, and a rubber cover. Resistant to oil, cold alkalis, and rust.

USE: Used to protect saw blades from being damaged when not in use. Cut to specific length.

USE TIP: This item is not listed on the AEL and can be acquired from damaged hoses. Cut to required length and shape with a utility knife.

REF: Repair Locker Tool Kit.
