


SECTION T

TAPE - LUMINESCENT



NSN 9390-01-078-8660

WT. 2.5 lbs

VOL.

108.0 in³

REFLECTIVE TAPE (WHITE)
3" Wide, 50 Yd Long

DESCRIPTION: A flexible colored, reflective tape, coated on one side with a pressure sensitive adhesive backing protected by a removable liner.

USE: Intended for use in reflectorizing surfaces such as signs and markers. Assures their visibility at night under normal and/or blackout conditions when exposed to a source of light and whether dry or wet by rain.

USE TIP: Wipe surface clean before applying.

REF: Repair Locker Tool Kit.

TAPE MEASURE - STEEL


1" X 25 FT

NSN 5210-01-335-1614

WT. 0.5 lbs.

VOL.

2.8 in³

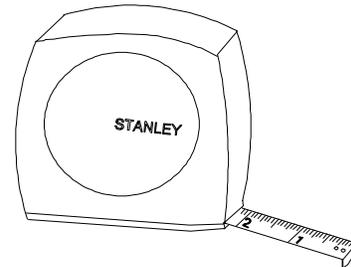

DESCRIPTION: Slightly concave steel tape, corrosion resistant steel ribbon w/ etched markings, mylar coating coiled inside a steel covered case with automatic rewind with lever lock feature. Graduations in feet, inches, and 8ths, one side only, start at outside end of ring..

USE: Distance measuring tapes for general use. (e.g. measurements during shoring cutting, layout and installation).

USE TIP: A small hoop is riveted loosely on the end for hooking over the edge of the object being measured. The looseness compensates for the thickness of the hook.

REF: Shoring Tool Kit.

TAPE - DUCT
2" WIDE ROLL - 6" DIA

NSN 5640-00-103-2254


WT. 1.8 lbs **VOL.** 72.0 in³

DESCRIPTION: Industrial sealing. Aluminum or silver-gray color. Plastic-coated, cloth-backed. High-tensile strength. 2" wide, 60 yd long.

USE: Ideal for heating and cooling systems-duct joints, straight runs, Y-joints, round or rectangular ducts. Stops air leakage. Vaporproof, prevents dust, moisture, and odors from entering duct.

USE TIP: May be used to secure duct installation or plastic sheet. Apply to clean surfaces.

REF: Collective Protection System (CPS) Repair Kit.




TAPE - INSULATION ELECTRICAL, BLACK
3/4" WIDE ROLL - 3" DIA
66 FT LONG

NSN 5970-00-185-8531

WT. 0.3 lbs **VOL.** 9.2 in³

ELECTRICAL TAPE
(BLACK)



DESCRIPTION: Adhesive type. Cotton fabric impregnated with a tacky adhesive insulating compound. Rated 1000V per mil thick dielectric strength. Approx 85 ft per roll.

USE: Used in general damage control electrical operations.

USE TIP: Apply to clean surfaces.

REF: Electrical Repair Kit.

TAPE - INSULATION ELECTRICAL, WHITE
3/4" WIDE ROLL - 3" DIA (F TYPE)

NSN 5970-00-686-9151

WT. 0.3 lbs **VOL.** 6.7 in³



ELECTRICAL TAPE
(WHITE)

DESCRIPTION: Adhesive type. Fiberglass, glass fabric backing with thermosetting adhesive. Rated 1000V min dielectric strength. Roll form.

USE: Used in high heat locations.


USE TIP: Apply to clean surfaces.

REF: Electrical Repair Kit.

TAPE - MEASURE, SOUNDING
50 FT

NSN 5210-00-221-1886

WT. 2.0 lbs. **VOL.** 69.5 in³

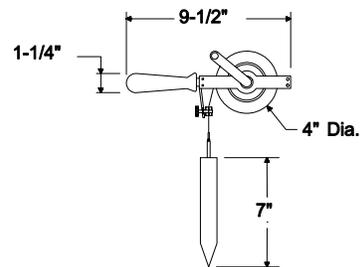

DESCRIPTION: Self-contained metal tape on wind-up reel.

USE: Used to sound tanks, voids and cofferdams.

USE TIP: Wipe tape clean after use.

REF: Sounding Kit.

TAPE - MEASURE, SOUNDING
75 FT

NSN 5120-00-221-1887


WT. 3.0 lbs. **VOL.** 81.4 in³

DESCRIPTION: Self-contained metal tape on wind-up reel.

USE: Used to sound tanks, voids and cofferdams.

USE TIP: Wipe tape clean after use. Substitute for 5210-00-221-1886.

REF: Sounding Kit.

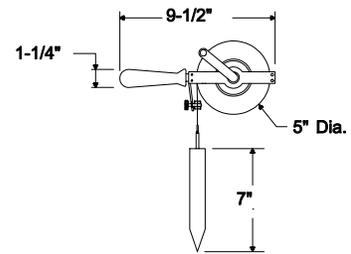

TAPE - PRESSURE SENSITIVE
3/4" WIDE ROLL - 6" DIA

NSN 7510-00-987-6661


WT. 0.5 lbs **VOL.** 27.0 in³

DESCRIPTION: Clear polyester-film, 72 yards long, 3/4" wide.

USE: Used for DCPO PMS when stenciling or painting is required.

USE TIP: Apply to clean surfaces.

REF: Damage Control Petty Officer (DCPO) Kit.



TERMINAL - QDSCNT

NSN 5940-00-197-4963 (F)

NSN 5940-00-196-2289 (M)


WT. 0.2 oz **VOL.** 1.6 in³ (SAMPLE)

DESCRIPTION: Recessed barrel single end type.
Copper alloy. Uninsulated.

USE: Used for connecting electrical power cable.

USE TIP: 3 each per kit, includes 1 spare each type.


REF: Welding Equipment Kit.



THIEF SAMPLER - (BOTTOM), LIQUID

NSN 6695-01-356-8181

WT. 3.0 lbs **VOL.** 8.2 in³

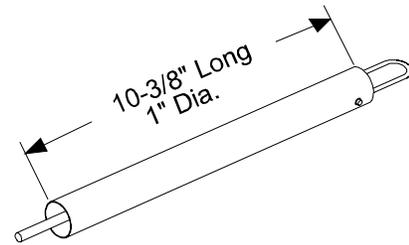

DESCRIPTION: Metal cylinder with a spring loaded self-opening/closing device.

USE: Used to take liquid samples from the sounding tubes of tanks.


USE TIP: To be manufactured by ships force.

REF: NAVSEA Drawing No. 804-5959238.

TIMER - OBA

NSN 4240-01-049-1024

WT. 0.2 lbs. **VOL** 16.0 in³



DESCRIPTION: Analog timer. 60 minute capacity.

USE: Used to time the duration of the use of the OBA.


USE TIP: Also can be used for monitoring other times.

REF: CBR Monitoring Team Kit.

TOOL BOX - PORTABLE
24" x 12" x 12"

NSN 5140-00-226-9018

WT. 14.0 lbs. **VOL.** 3,456.0 in³



DESCRIPTION: Metal construction with carrying handle on top.

USE: Used to carry gas free test equipment.


USE TIP: Utilize tool box designated or equal.

REF: Gas Free Engineer Kit.

TOOL BOX - PORTABLE
7" x 7" x 16"

NSN 5140-00-315-2747

WT. 6.0 lbs **VOL.** 784.0 in³



DESCRIPTION: Metal construction with carrying handle on top.

USE: Used to carry the following tools: caulking iron, cold chisel, hammer, lathing hatchet, half hatchet, handsaw - shortcut 15" and 12" sheers".

USE TIP: Stow mauls in bag.

REF: Plugging Kit.

TOOL BOX - PORTABLE

NSN 5140-00-587-5558


WT. 6.8 lbs **VOL.** 1,036.0 in³

DESCRIPTION: Metal construction, locking hasp, carrying handle.

USE: Used to carry DCPO PMS tools.


USE TIP: Utilize tool box designated or equal.

REF: Damage Control Petty Officer (DCPO) Kit.



TUBE -

NSN 6665-00-769-0945 CARBON DIOXIDE
NSN 6665-00-769-0949 CARBON MONOXIDE
NSN 6665-01-102-9485 ETHYLENE OXIDE
NSN 6665-01-384-1508 HYDROCARBON 2
NSN 6665-00-769-0959 HYDROCYANIC ACID
NSN 6665-01-010-7959 HYDROCHLORIC
NSN 6665-01-010-7960 HYDROGEN FLUORIDE
NSN 6665-01-010-7961 HYDROGEN SULPHIDE
NSN 6665-01-010-7963 NITROGEN DIOXIDE
NSN 6665-01-010-7965 PHOSGENE
NSN 6665-01-010-7969 VINYL CHLORIDE
(BOX OF 10)
WT. 0.3 oz **VOL.** 9.6 in³

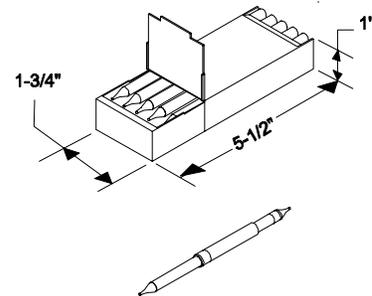

DESCRIPTION: Gas detector sampling tubes for measuring levels of airborne contaminants. Made of glass with measurement indicators specific to each gas being measured.

USE: Used with the Draeger test set to test for toxic gases.

USE TIP: Items to be stowed together as a kit for immediate access.


REF: Gas Free Engineer Kit.

TWINE - HEMP FIBROUS

NSN 4020-00-231-5870

WT. 1.0 lb

VOL. 64.0 in³



DESCRIPTION: Hemp, twisted construction, natural color w/polished wax finish. Size 60, 190 lb. min breaking strength. Length - 97 yards.

USE: Used to rope off contaminated areas and to secure signs from monitoring kit.

USE TIP: Issued in ball form.

REF: CBR Monitoring Team Kit.
